




**VF200**  
**VF400**  
HIGH SPEED  
COMMERCIAL  
VACUUM FRICTION  
FEEDERS

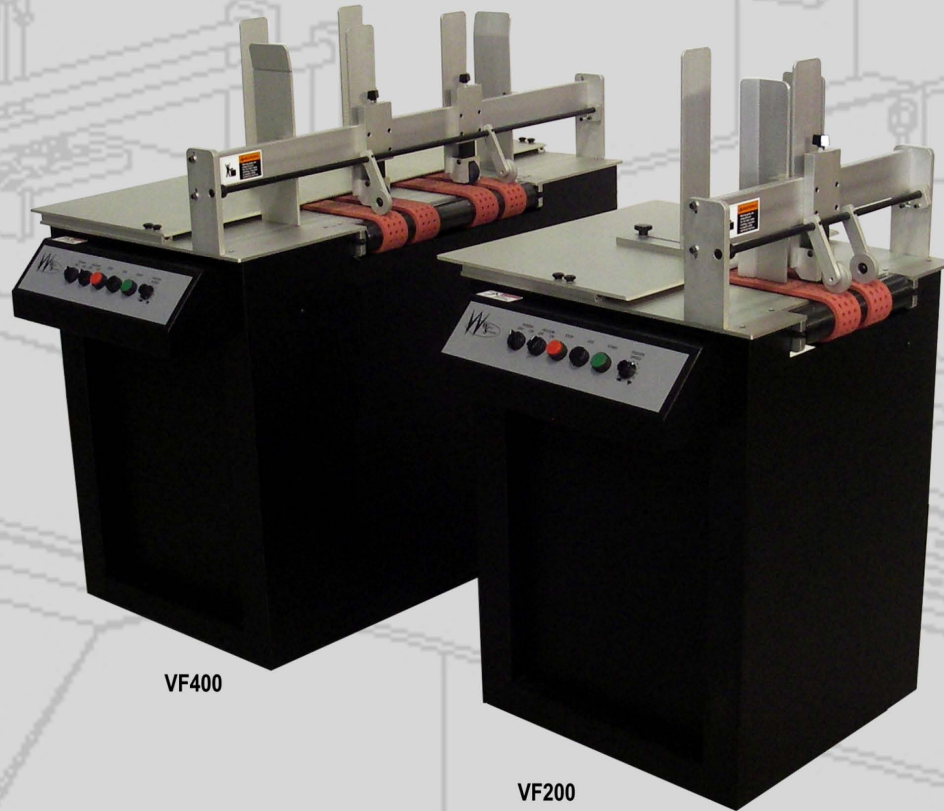

VF400

VF200

**Patent Pending**

Walco Systems has created the next progression of feeders for a new era. The Evolution series feeders are engineered to easily feed a wide variety of products therefore eliminating the high costs of purchasing both a shuttle and friction feeder. Operators will appreciate the new innovative design which allows for quick and easy setup. Quality components will insure customer satisfaction.

Like all Walco Systems products, the Evolution series feeders are designed for the high capacity use demanded by today's commercial environment.

## Features:

- Quick and Easy Setup
- Variable Speed Transport
- Adjustable Infeed Product Guides
- Ergonomic Operator Panel
- Feeds Wide Variety of Products
- High Capacity Feed Hopper
- Independently Controlled Self-Contained Vacuum
- Non-Proprietary Components

## Uncompromising Drivetrain:


- High Torque Gear Drive Motor
- Steel Drive Pulleys
- 12" Wide Steel Rollers
- Large Diameter Steel Shafts
- Sealed Shaft Locking Collar Bearings

## Feeds:

Bags Envelopes Heavy Card Stocks Corrugated Cardboard Jewel Cases  
Perfect Bound Books Calendars Sheet Stocks

## Feed and Transport for:

Affixing and Inkjet Equipment

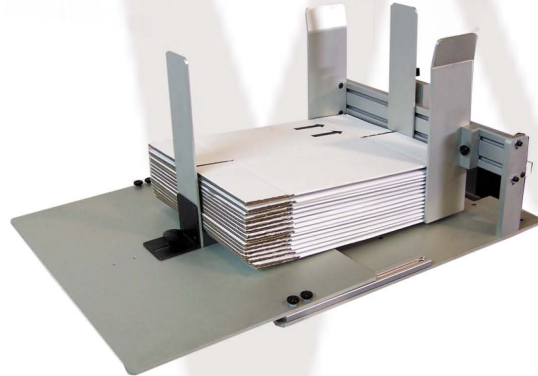

## Options:

### Speed Following

Allows Walco Systems feeders & transports to maintain matching belt speeds, using one speed control.

### Demand Feed

Allows Walco Systems feeders to feed one piece on a demand signal.

## Specifications:

### VF200

**Material Size:** Min. 3"W x 5"L - Max 19.5"W x 28"L  
**Material Thickness:** 1" Max (In Standard Configuration)  
**Electrical:** 110 VAC 1-Phase 10 Amp Circuit  
**Interlock:** Dry Contact (Low Volt) Standard  
**Operator Controls:** Power (on/off), Vacuum (on/off),  
Stop, Jog, Start, Feed Speed  
**Physical:** 24"L x 23.5"W x 33-36" H

### VF400

**Material Size:** Min. 3"W x 5"L - Max 41"W x 28"L  
**Material Thickness:** 1" Max (In Standard Configuration)  
**Electrical:** 110 VAC 1-Phase 10 Amp Circuit  
**Interlock:** Dry Contact (Low Volt) Standard  
**Operator Controls:** Power (on/off), Vacuum (on/off),  
Stop, Jog, Start, Feed Speed  
**Physical:** 24"L x 50.5"W x 33-36" H

**Patent Pending**

All Specifications Subject To Change Without Notice



# Walco Systems LLC

1431-B Lear Industrial Pkwy  
Avon, Ohio 44011

440.937.0909 440.937.0910 (fax)  
www.walcosystems.com  
email: info@walcosystems.com

Authorized Walco Systems LLC Distributor

