


VF200
VF280
HIGH SPEED
COMMERCIAL
VACUUM FRICTION
FEEDERS

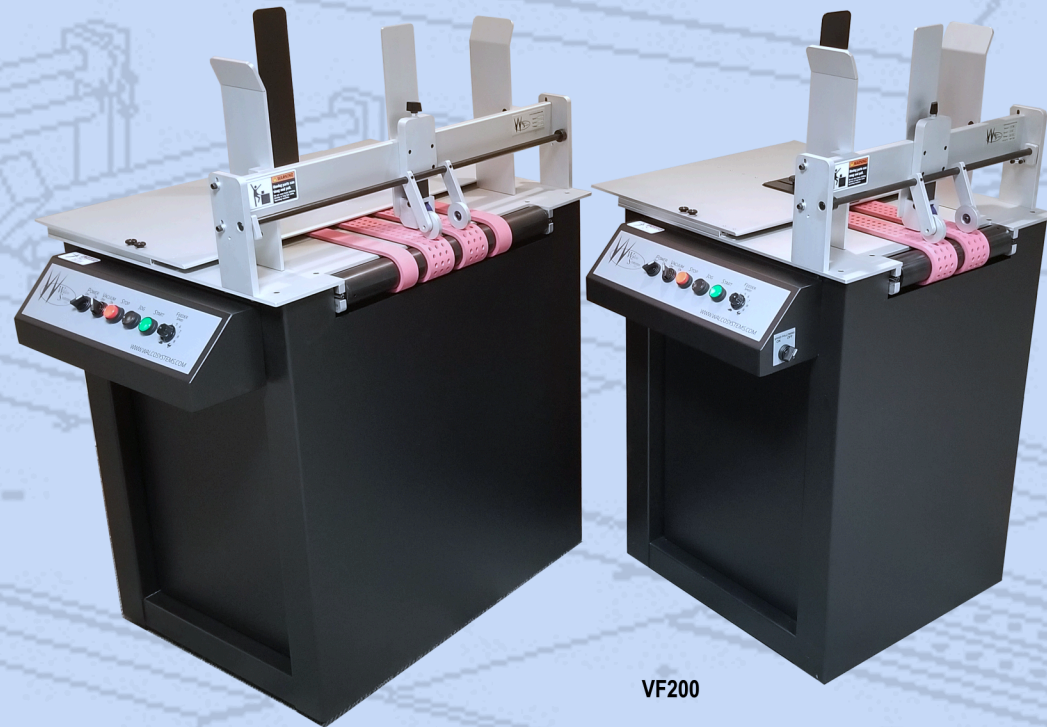

VF280

VF200

**PATENTED FEED
TECHNOLOGY**

The VF200 offers a radically innovative design not available anywhere else.

Every part in this feeder - from the precision machined guides, to the sealed shaft locking collar bearings - was designed to take an outstanding amount of abuse. Over 50 inches of two (2) 2-1/2 inch wide belts offer an astonishing amount of friction. Add vacuum to the equation and you have a machine capable of pulling any product.

Employing every concept that makes up the VF200, the VF280 ups the ante and allows for wider pieces to be fed. Designed primarily for cardboard, this machine allows products to contact 180 square inches of natural gum rubber belting.

Like all Walco Systems products, the Evolution series feeders are designed for the high capacity use demanded by today's commercial environment.

Features:

- Quick and Easy Setup
- Variable Speed Transport
- Adjustable Infeed Product Guides
- Ergonomic Operator Panel
- Feeds Wide Variety of Products
- High Capacity Feed Hopper
- Independently Controlled Self-Contained Vacuum
- Non-Proprietary Components

Uncompromising Drivetrain:


- High Torque Gear Drive Motor
- Steel Drive Pulleys
- 12" / 20" Wide Steel Rollers
- Large Diameter Steel Shafts
- Sealed Shaft Locking Collar Bearings

Feeds:

Bags Envelopes Heavy Card Stocks Corrugated Cardboard Jewel Cases
Perfect Bound Books Calendars Sheet Stocks

Feed and Transport for:

Affixing and Inkjet Equipment

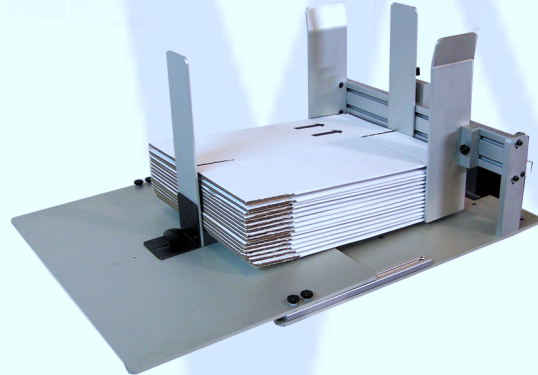

Options:

Speed Following

Allows Walco Systems feeders & transports to maintain matching belt speeds, using one speed control.

Demand Feed

Allows Walco Systems feeders to feed one piece on a demand signal.

Specifications:

VF200

Material Size: Min. 3"W x 5"L - Max 19.5"W x 28"L
Material Thickness: 1" Max (In Standard Configuration)
Electrical: 110 VAC 1-Phase 10 Amp Circuit
Interlock: Dry Contact (Low Volt) Standard
Operator Controls: Power (on/off), Vacuum (on/off),
Stop, Jog, Start, Feed Speed
Physical: 24"L x 23.5"W x 33-36" H

VF280

Material Size: Min. 3"W x 5"L - Max 29"W x 28"L
Material Thickness: 1" Max (In Standard Configuration)
Electrical: 110 VAC 1-Phase 10 Amp Circuit
Interlock: Dry Contact (Low Volt) Standard
Operator Controls: Power (on/off), Vacuum (on/off),
Stop, Jog, Start, Feed Speed
Physical: 24"L x 37.5"W x 33-36" H

**PATENTED FEED
TECHNOLOGY**

All Specifications Subject To Change Without Notice



Walco Systems LLC

33588 Pin Oak Parkway
Avon Lake, Ohio 44012

440.930.4850 440.930.4851 (fax)
www.walcosystems.com
email: info@walcosystems.com

copyright © 2019 Walco Systems LLC.

Authorized Walco Systems LLC Distributor

